


WOODCRACKER® CL



WOODCRACKER® CL

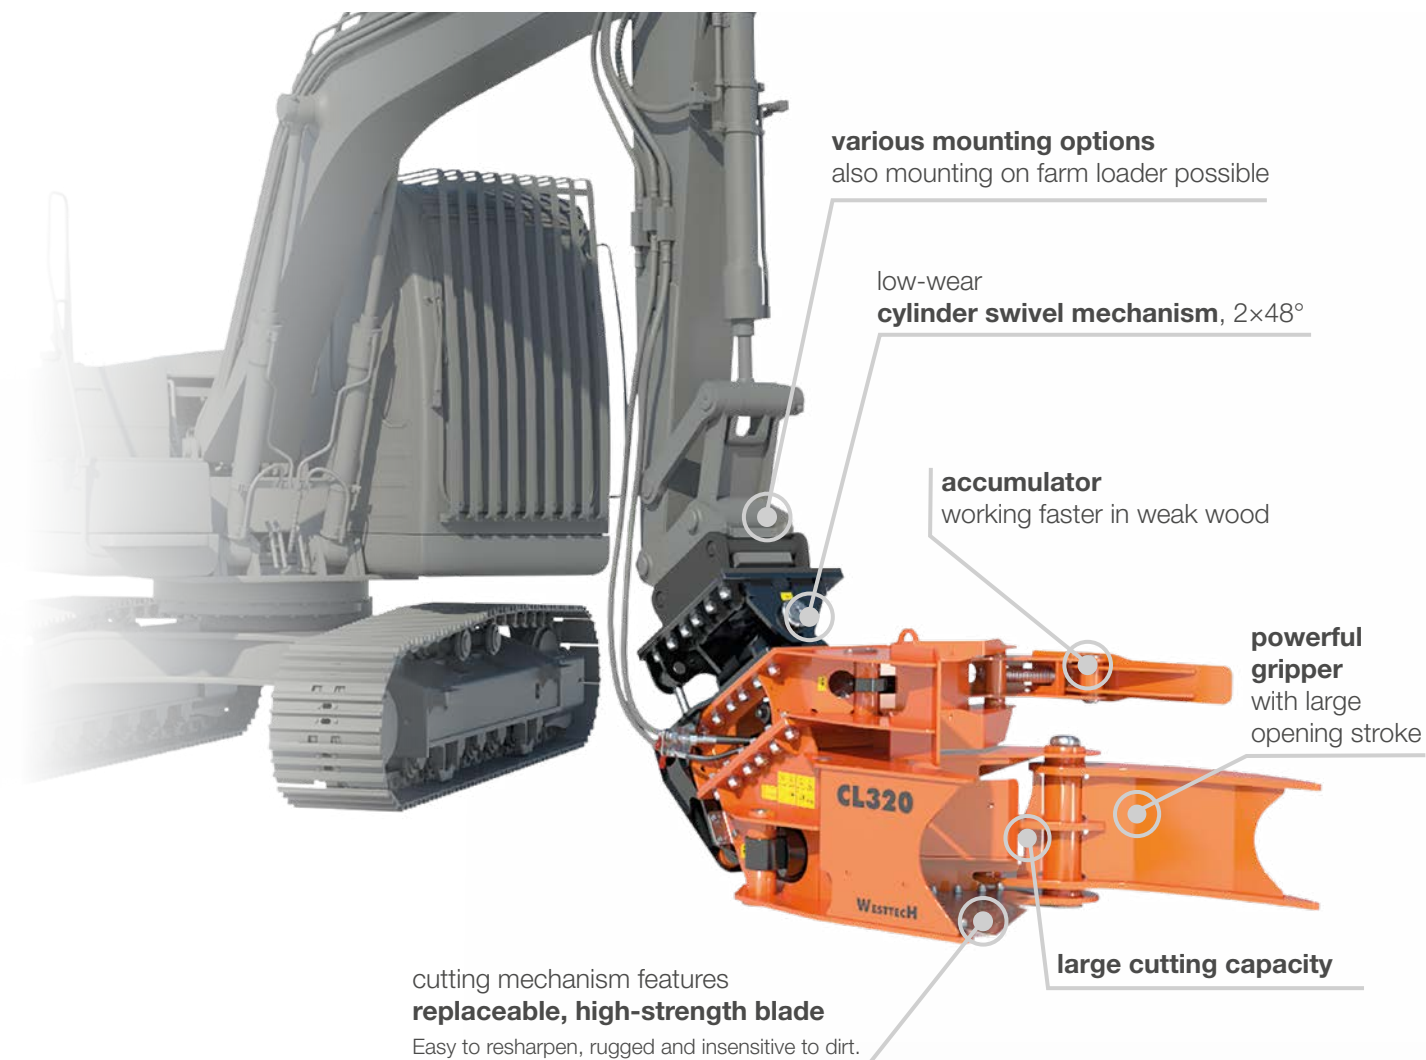

KEY FACTS

- Various mounting options (eg. excavator, farm loader).
- Due to low net weight, mountable to farm loaders, telehandlers or wheel loaders.
- Proper and simple connection at the headstock with ideal mounting angle.
- Protected and generously sized hydraulic piping.
- Robust and proven technology – Low-wear and low-service.
- KTL-primed (cathodic dip-coating) and powder coating. Made of high-strength Hardox® steel.



The Woodcracker® CL is also attachable to farm loaders.

The fast and agile Woodcracker® CL cutting head is a reliable companion, and not only in agricultural applications. Professional gardeners, forest managers, but also communal organisations already have the Woodcracker® CL in permanent use. Thanks to flexible and easy mounting to common vehicles, small trees and brush up to 40 cm trunk diameter can be mechanically harvested with ease.

Caution: Woodcracker® CL is not suitable for dangerous tree felling. Secure grip of cut material can not be guaranteed. In this case we recommend our Woodcracker® C- or CS series.



TECHNICAL DATA




WOODCRACKER® CL	CL 190	CL 260	CL 320
Cutting diameter soft wood (mm)	250	320	400
Cutting diameter hard wood (mm)	190	260	320
Gripper opening = shear opening (mm)	685	760	1060
Deadweight (Base – Full equipment) (kg)	210 - 400	360 - 680	620 - 1170
Recommended pump flow capacity main circuit ¹⁾ (l/min.)	40 - 80	50 - 100	70 - 150
Recommended pump flow capacity auxiliary circuit ¹⁾ (l/min.)	20 - 30	40 - 60	45 - 60
Recommended operating pressure main circuit (bar)	250	280	280
Recommended operating pressure auxiliary circuit (bar)	200	200	200
Service weight of carrier vehicle ²⁾ (t)	2,5 - 7,5	6 - 14	12 - 20
Optional: Autospeed	•	•	•
Optional: Cylinder swivel unit	• 2 x 40°	• 2 x 48°	• 2 x 48°
Optional: Accumulator	•	•	•

Technical data and illustrations are not binding. Subject to changes for reasons of further development.

¹⁾ Depending on operating mode or equipment. ²⁾ Depending on carrier vehicle's specifications. • available - not available

APPLICATION AREAS

- Fast harvest of small trees and bushes.
- Harvest of short rotation plantations.
- In rough terrain, hill areas and in bog areas.
- Cultivation and landscape maintenance.
- For agricultural use on a farm loader, telehandler or wheel loader.

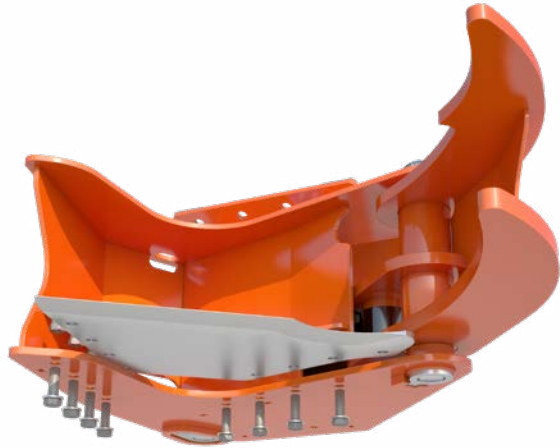

easily replaceable blade



For mini excavators from 2,5t.



Fast harvest of small trees and bushes.



Optional available with accumulator.



Woodcracker® CL cuts weak wood up to 40 cm.