

The fast cutting head at a fantastic price!

The fast and agile WOODCRACKER® CL cutterhead is a reliable companion, and not only in agricultural applications. Professional gardeners, forest managers, but also communal organisations already have the WOODCRACKER® CL in uninterrupted use. Thanks to flexible and easy installation on popular vehicles, small trees and shrubs up to 32 cm trunk diameter can be mechanically harvested with ease.




Technical data

WOODCRACKER® CL

	CL 190	CL 260	CL 320
Cutting diameter, softwood	250	320	400
Cutting diameter, hardwood	190	260	320
Gripper opening stroke = shear opening stroke	685	760	1060
Deadweight (basic - fully equipped)	210 - 310	350 - 630	620 - 1170
Recommended litre capacity in the main circuit (l/min.) ¹⁾	40 - 80	50 - 100	70 - 150
Recommended operating pressure in the main circuit (bar)	250	280	280
Recommended litre capacity in the auxiliary circuit (l/min.)	20 - 30	40 - 60	45 - 60
Recommended operating pressure in the auxiliary circuit (bar)	200	200	200
Service weight of carrier vehicle (t) ²⁾	2.5 - 7.5	6 - 14	12 - 20
Optional: Autospeed	●	●	●
Optional: Collector	●	●	●
Optional: Cylinder swivel unit	● 2 x 40°	● 2 x 48°	● 2 x 48°

¹⁾ Depending on the operating mode or Woodcracker equipment line. ²⁾ Depending on the carrier vehicle equipment. Technical changes and illustrations are non-binding. Changes for reasons of on-going development reserved.

● available - not available

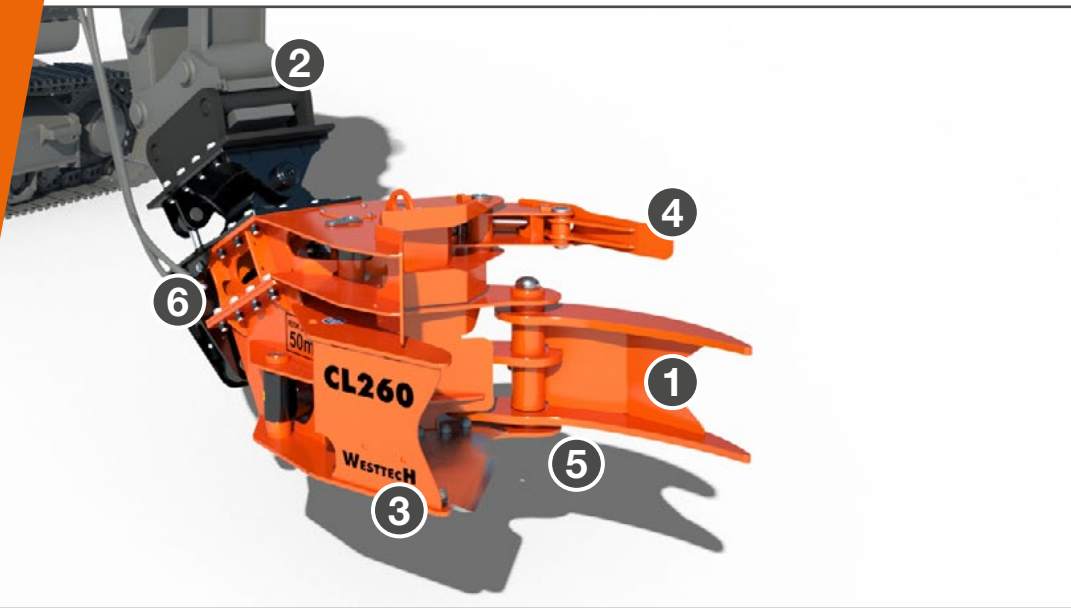

1 Powerful **gripper**/cutting mechanism with large opening stroke

2 Thanks to different mounting options also mounting to farm loader possible.

3 **Cutting mechanism** features replaceable, high-strength knife. Easy to sharpen, rugged and insensitive to dirt.

4 Optional: **Collector** for scrub material for faster work. Very easy to remove to reduce weight when working with large material.

5 Optional: low-wear cylinder slewing system 2x48°.



5 High **cutting capacity**

6 Clear-cut and uncomplicated **attachment design** in the mounting bracket with optional attachment bracket. Protected and generously dimensioned hydraulic hoses

+ **CDP-primed** (cathodic dip painting) and powder top coat

+ Made of high-strength **Hardox® steel**

+ **Low** maintenance and **wear**

+ Highly **rugged** and durable



Applications

- Fast harvesting of small trees and brush
- Felling of short-rotation plantations
- In open terrain, on slopes, in marshy areas
- Cultivation and landscaping
- In agricultural applications on the farm loader/Hoftrac

Caution: Woodcracker® CL is NOT suitable for safety tree felling work. A secure hold of the cut material cannot be guaranteed. We recommend our Woodcracker C series for this application.

About the manufacturer

Westtech's know-how and products are entirely produced in Upper Austria. The design and applicability of WOODCRACKER® machines are characterised by easy handling, simple attachment, flexibility and efficiency. These principles can be found in all of our individual product series. The range covers applications from tree felling, wood milling and processing to soil preparation and rootstock removal.

For more information on our machines and activities, go to www.westtech.at